OUTLINE
3-PHASE
INDUCTION MOTOR
(TS21FII SERIES)

TOTALLY ENCLOSED
FAN COOLED
SQUIRREL CAGE ROTOR
ANTI-FRICTION BEARING

PROJECT NO:

CUSTOMER:
PO. NO:
ORDER NO:

OUTPUT	POLE	SYN. SPEED	VOLT.	FREQ	INSUL.	TIME RATING	MODEL	FRAME NO.
		RPM.	V.	HZ	F	CONT.	TIK-FCK	N400LL

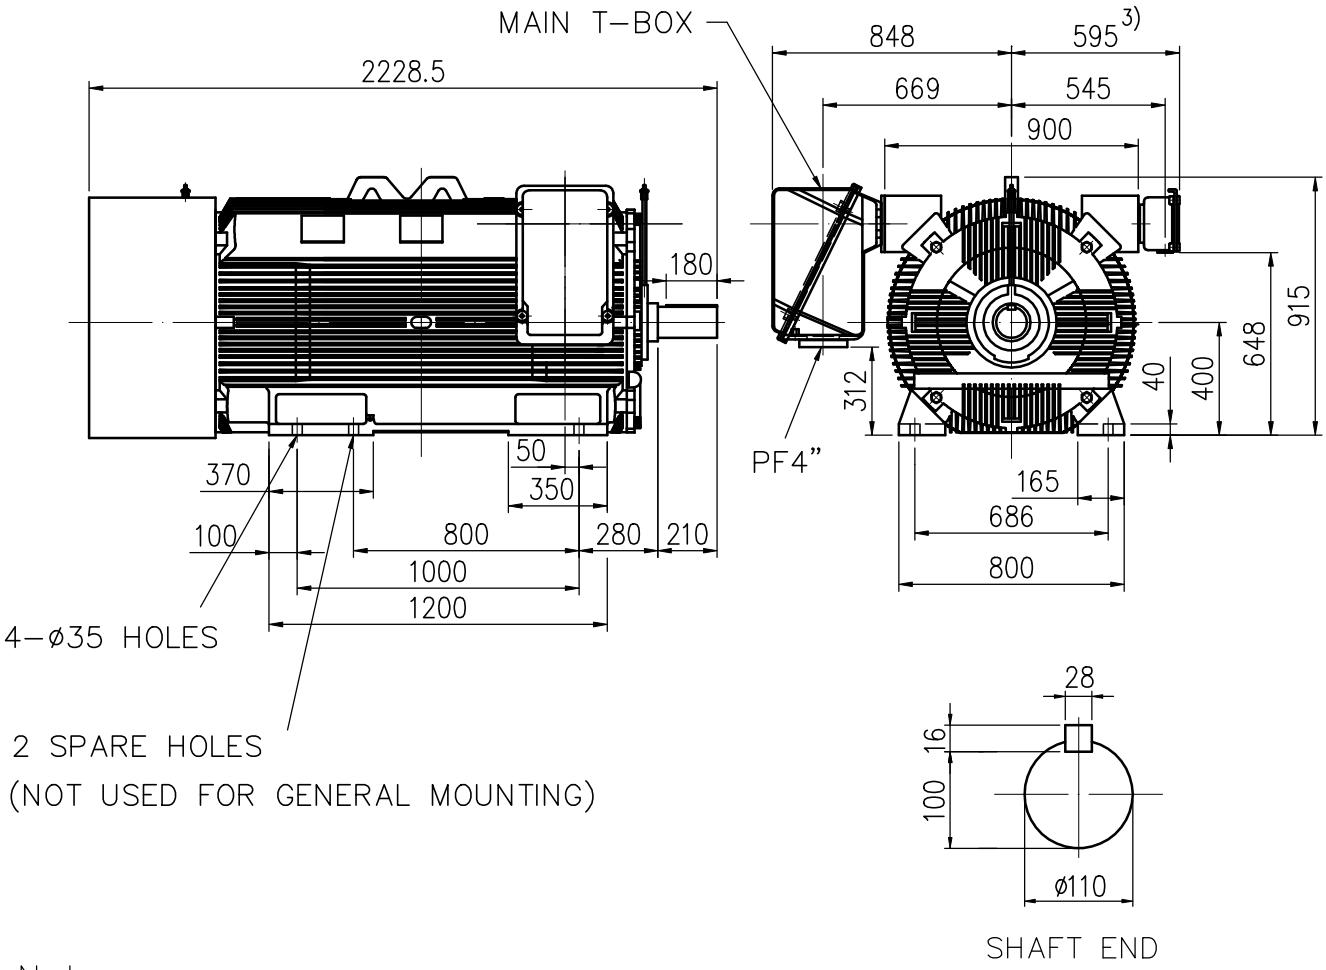

SHAFT END

Note:
1) Tolerance of shaft end diameter : m6
2) Tolerance of shaft center height : +0 , -1.0
3) Auxiliary terminal box is optional and dependent on specified accessories.
4) For direct coupling.
5) Approximate weight of maximum rated power= 4150 kg
6) Drive end bearing: 6224C3
   Opposite drive end bearing: 6224C3
7) Rotation: C.W Viewed from Non-Drive end.
8) Total length will be extended 300 mm for low noise level.

Preliminary Only

TATUNG

BASIC DWG NO: FB-5918

CERTIFIED BY:		DATE:
DESIGNED	C.H.CHANG	DIMENSIONS IN mm
CHECKED	W.C.HUANG	3RD ANGLE PROJECTION
APPROVED	T.F.CHENG	DATE: