PROJECT NO:

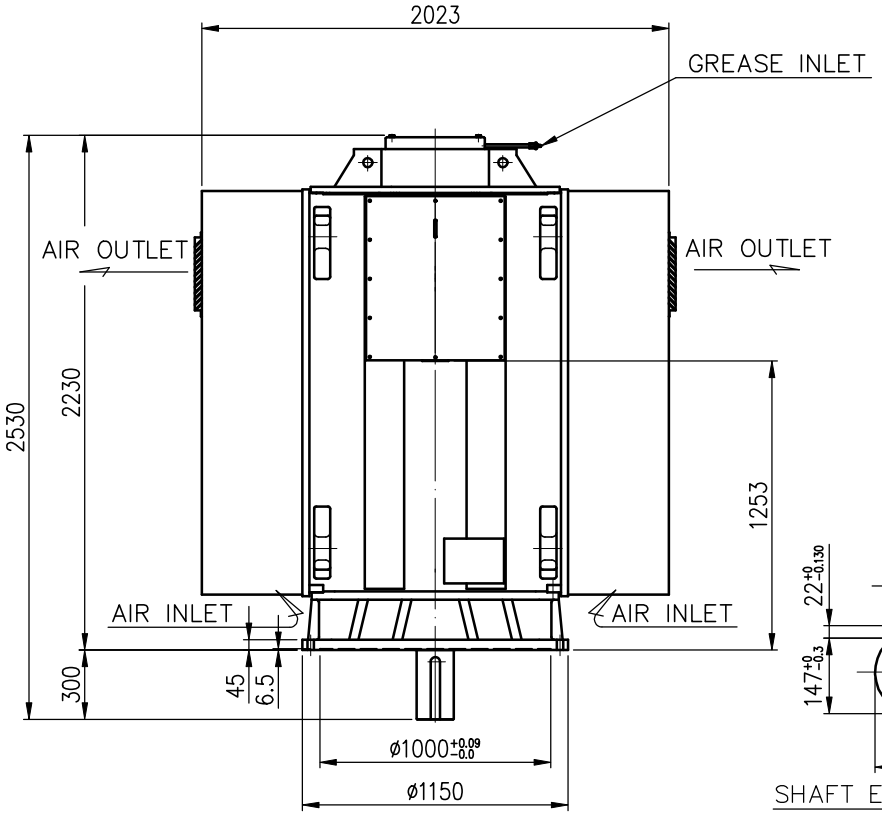

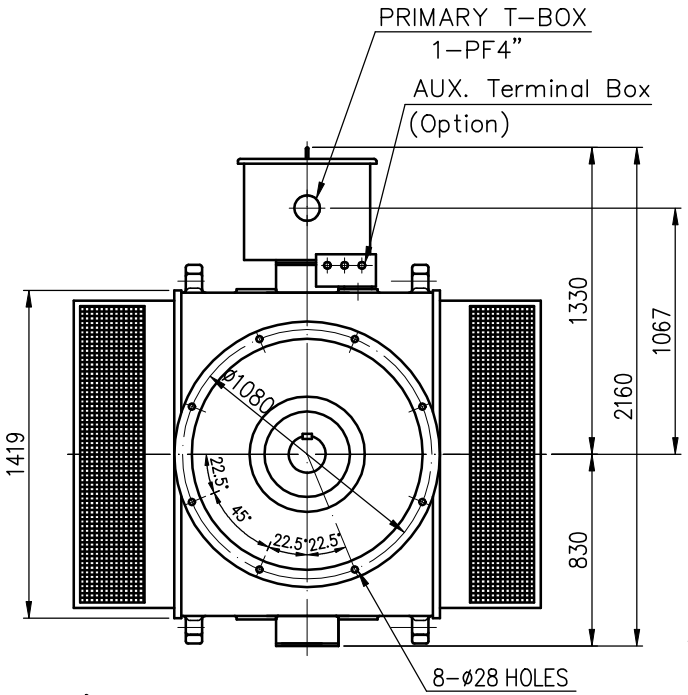

VIEW FROM DRIVE END



SHAFT END DIMENSIONS

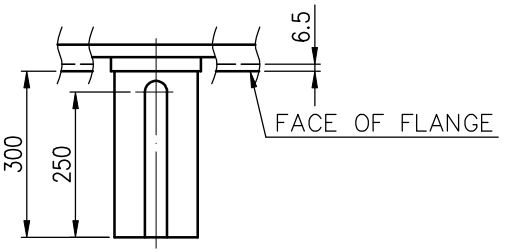

TECHNICAL INFORMATION

1. ENCLOSURE: WPII
2. BEARING LUBRICATION:
   DRIVE END: GREASE
   NON DRIVE END : GREASE
3. ROTATION: _____
   VIEW FROM NON-DRIVE END
4. WITHOUT NONREVERSE RATCHET MECHANISM
5. EXTRA DOWN THRUST LOAD SHALL NOT BE ALLOWED

PRELIMINARY ONLY

CERTIFIED BY: _____ DATE: _____

ADDITIONAL INFORMATION

OUTPUT	POLES	VOLTS	FREQ. Hz	SYN. SPEED r/min	BEARING	PROTECTION IP-23
					LOAD SIDE 6034C3	APPROX. WEIGHT
						MOTOR 9500 kg

TYPE	FORM	INS.CLASS	RATING	FRAME	FLANGE	OPP.L.SIDE
TIK	VCKTWII	F	S1	N5014V		7330B

REVISIONS		
		REV.MARK
		DATE
		APPROVED BY
		REVISED BY
		CONTENT

SCALE

UNITS mm

APPROVED BY	CHECKED BY
T.F.CHENG FEB.15.2011	T.F.CHENG FEB.15.2011
DESIGNED BY	DRAWN BY
C.Y.WEN FEB.15.2011	C.Y.WEN FEB.15.2011

TATUNG

TITLE

OUTLINE FOR THREE PHASE INDUCTION MOTOR

DRAWING NO. *AL-VB-1808*

REV.MARK 00