# OUTLINE
# 3-PHASE
# INDUCTION MOTOR

TOTALLY ENCLOSED FAN COOLED,SQUIRREL CAGE ROTOR
PREMIUM EFFICIENCY
IE3 SERIES

FILE NO:

CUSTOMER:
PO. NO:
ORDER NO:

| OUTPUT | POLE | SYN. SPEED | VOLT. | FREQ. | TIME RATING | MODEL | FRAME NO. |
|---|---|---|---|---|---|---|---|
| | | | | | S1 | FHFC | 132S |

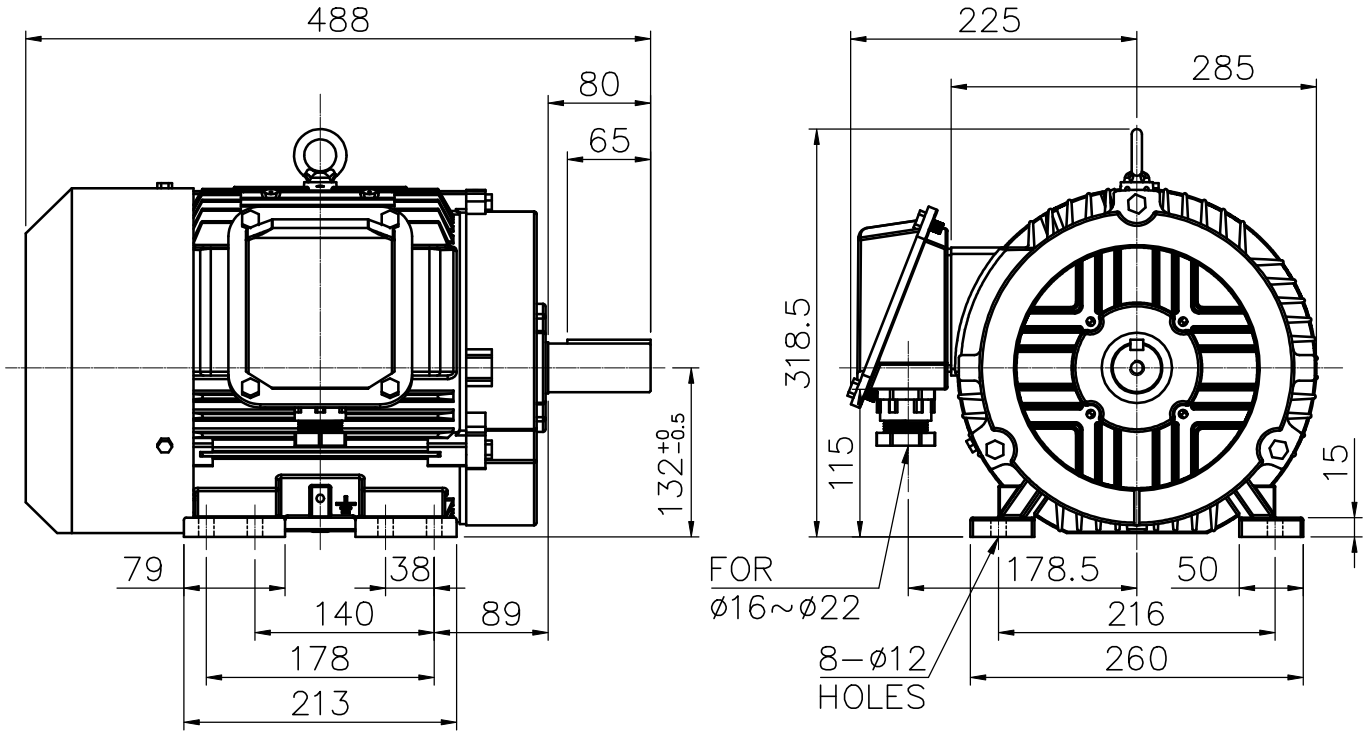


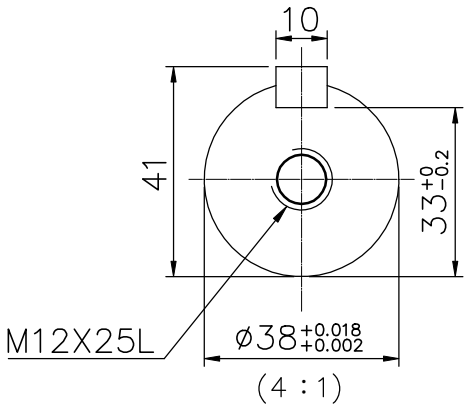


| BEARING NO : | | APPROX. WEIGHT |
|---|---|---|
| D.E | O.D.E | |
| 6308ZZC3 | 6208ZZC3 | 70kg |

NOTE: 1. F CLASS INSULATION.
2. IP55.

Preliminary Drawing for Reference Only

TATUNG

| CERTIFIED BY : _____ DATE : _____ | | | |
|---|---|---|---|
| DESIGNED | J.Y. SU | DWG. NO : AS-104756 | REV. |
| CHECKED | C.P. SU | 3RD ANGLE PROJECTION | 00 |
| APPROVED | C.P. SU | DIMENSIONS IN mm | |