


# OUTLINE 3-PHASE INDUCTION MOTOR

TOTALLY ENCLOSED FAN  
COOLED, SQUIRREL CAGE  
ROTOR (WMP-90)

FILE NO:  
CUSTOMER:  
PO. NO:  
ORDER NO:

OUTPUT	POLE	SYN. SPEED R.P.M	VOLT. V	FREQ Hz	INSUL. F	TIME RATING S1	MODEL FHFC-HD	FRAME NO. 132SM
	2P							

\*\* IE3 EFFICIENCY  
\*\* FOR DIRECT COUPLING  
\*\* IP54

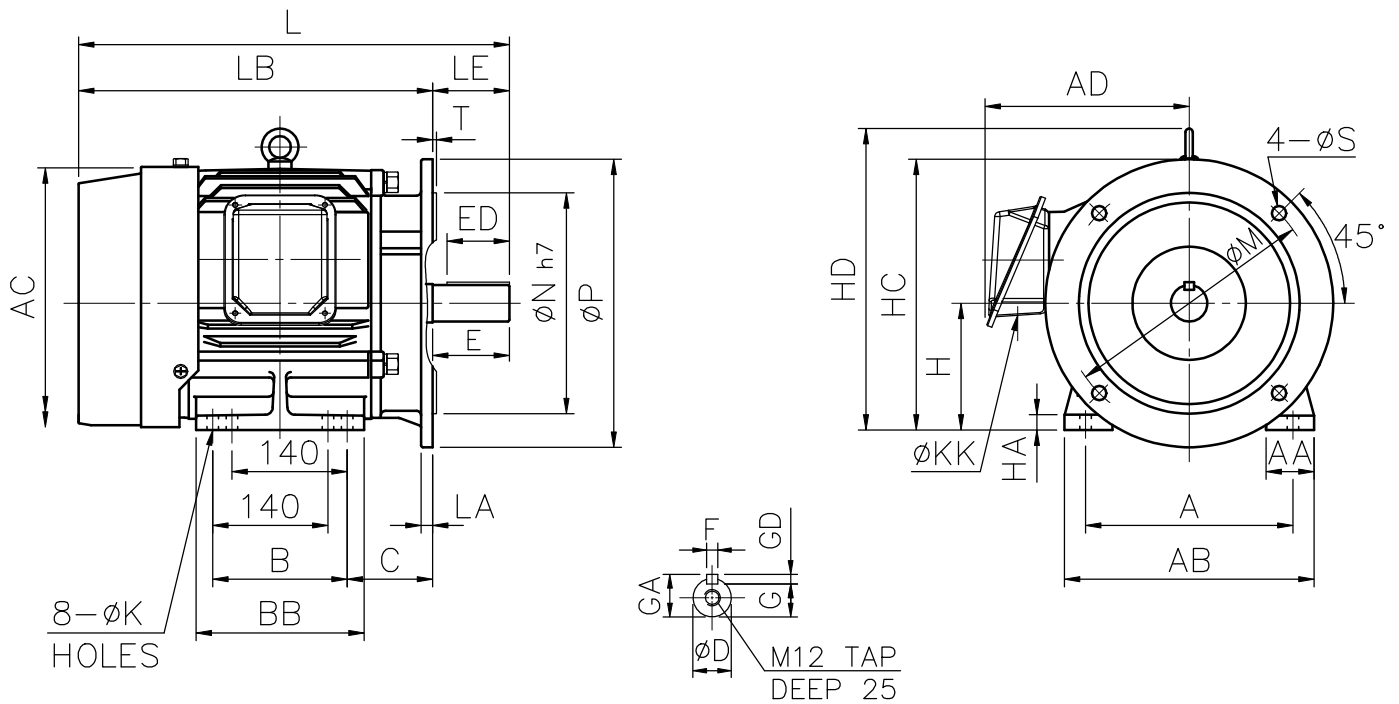

Preliminary Drawing  
For Reference Only

A	B	C	H	ØK	L	AA	AB	ØAC	AD	LB	LE	BB	HA	HD	HC	ØKK
216	178	89	132	12	488	50	260	286	213	408	80	213	15	316	274	35

ØM	ØN	ØP	ØS	T	LA	SHAFT END							BEARING NO.		APPROX WEIGHT
						ØD	E	ED	F	G	GD	GA	D.E	O.D.E	
265	230	300	14.5	4	12	38	80	65	10	33	8	41	6308zz	6208zz	85kg

NOTE: 1. TOLERANCE OF SHAFT END DIAMETER D: k6 (+0.018 , +0.002)  
2. TOLERANCE OF SHAFT CENTER HEIGHT H: +0 , -0.5

CERTIFIED BY : \_\_\_\_\_ DATE : \_\_\_\_\_



DESIGNED	T.Y.Ku Dec.25.2017	DWG. NO: AS-064002
CHECKED	L.J.Lee Dec.25.2017	3RD ANGLE PROJECTION
APPROVED	L.J.Lee Dec.25.2017	DIMENSIONS IN mm