OUTLINE
3-PHASE
INDUCTION MOTOR

TOTALLY ENCLOSED FAN COOLED,SQUIRREL CAGE ROTOR

PREMIUM EFFICIENCY IE3 SERIES

FILE NO:

CUSTOMER:

PO. NO:

ORDER NO:

OUTPUT	POLE	SYN. SPEED	VOLT.	FREQ	TIME RATING	MODEL	FRAME NO.
					S1	FHFC-W	280M

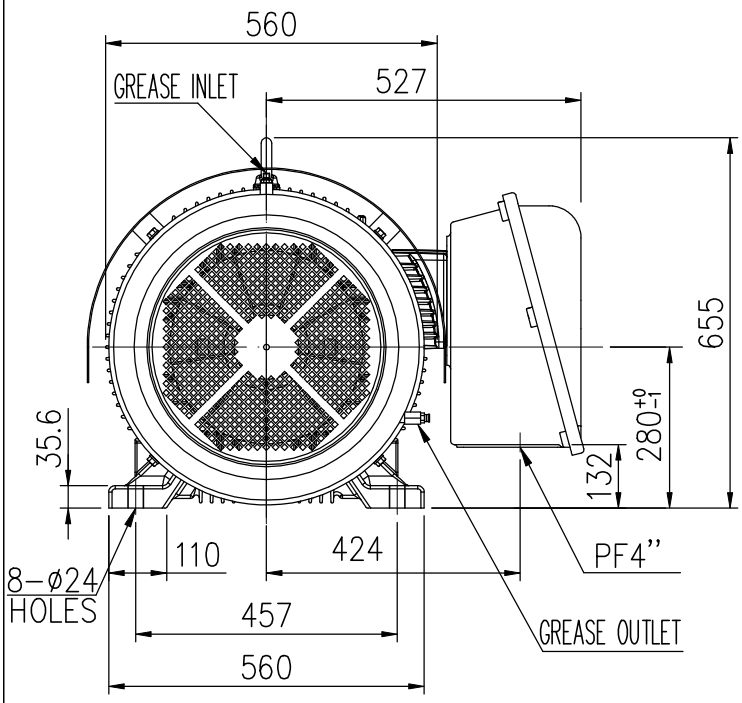

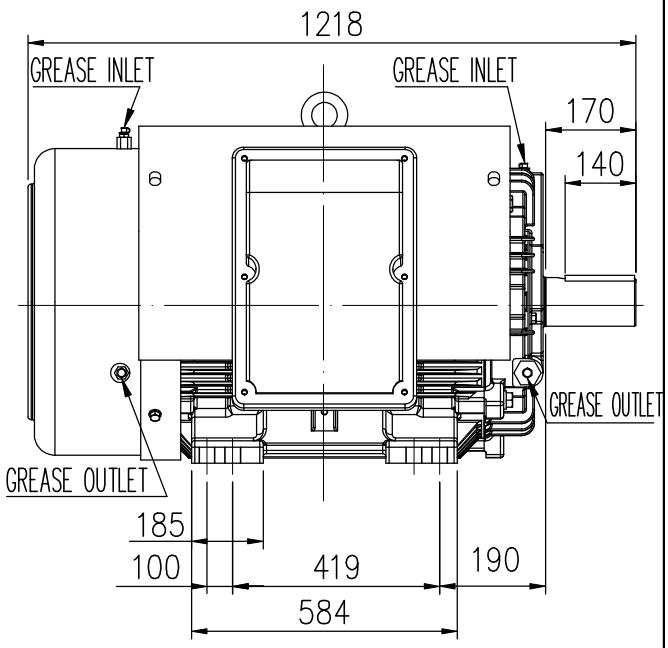

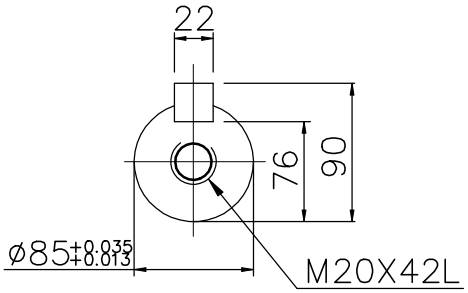

BEARING NO.		APPROX
D.E	O.D.E	WEIGHT
6318ZC3	6316ZC3	890 kg

NOTE:1. F CLASS INSULATION.
2. FOR DIRECT COUPLING.

Preliminary Drawing for Reference Only

TATUNG

CERTIFIED BY:_____ DATE:_____			
DESIGNED	W.T. LIAO	DWG. NO: AS-032561	REV.
CHECKED	S.Y. HSIAO	3RD ANGLE PROJECTION	01
APPROVED	S.Y. HSIAO	DIMENSION IN mm	