
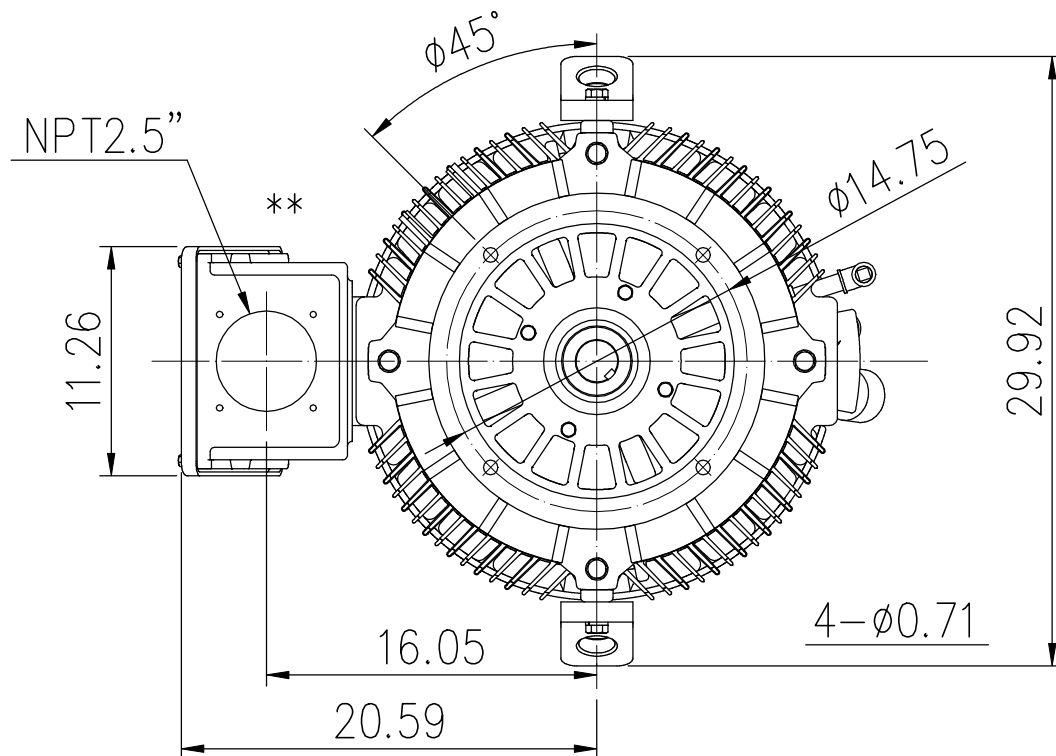
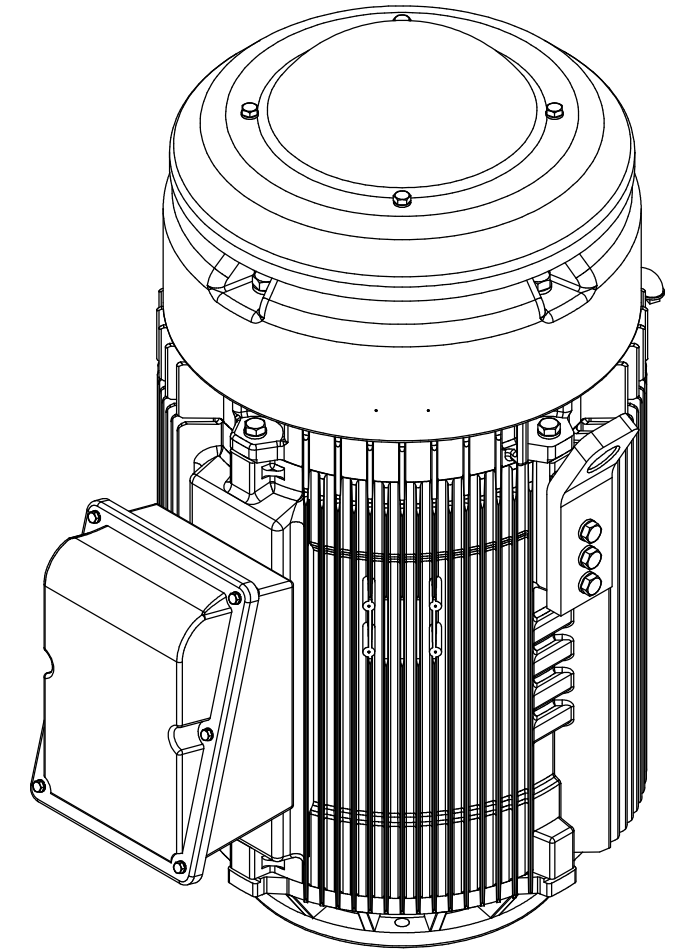
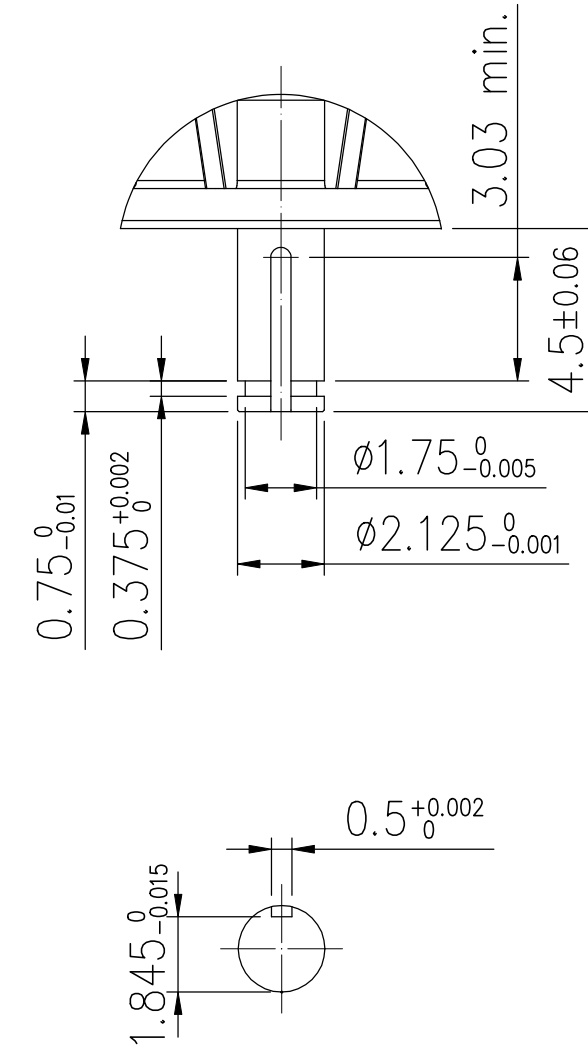


Preliminary Drawing, For Reference Only.

FRAME 444VP16/445VP16

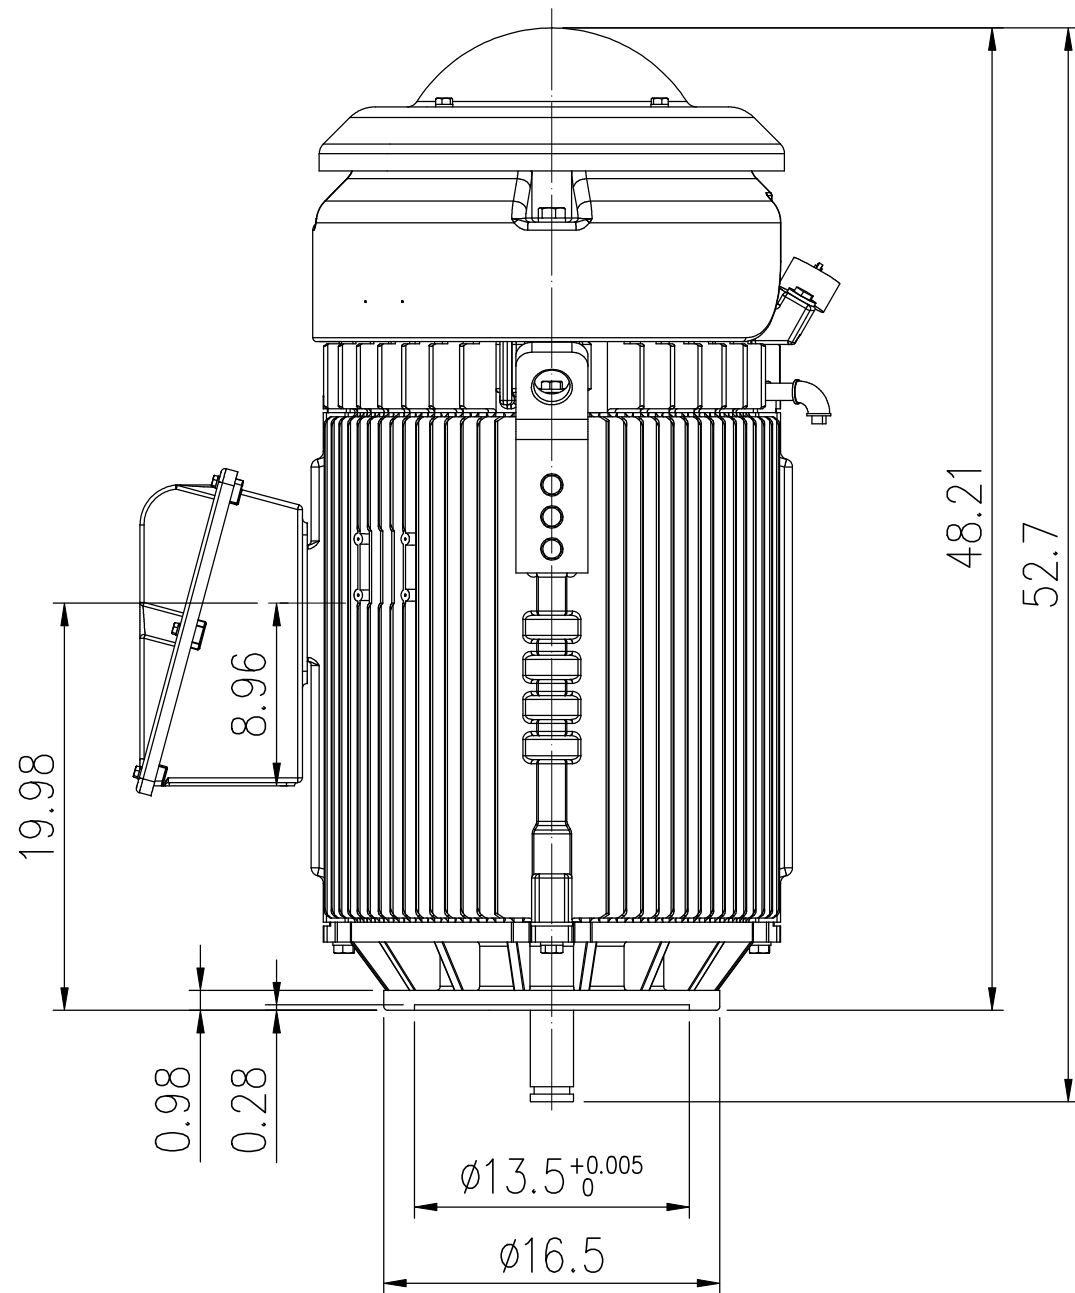

** CONDUIT BOX CAN BE ROTATED IN STEP OF 90°

***MAX. DOWN THRUST : 4P = 9550 lbs
6P = 11050 lbs

OUTPUT HP	POLE	VOLT	FREQ.	SYN. R.P.M.	BEARING LOWER SIDE 6218ZZ UPPER SIDE 7224DT	APPROX WEIGHT 2070 lb	FILE NO. : CUSTOMER : PO. NO. : ORDER NO. :
TYPE TEFC	FORM VSS	INS. CLASS F	RATING	FRAME 444/5VP	PROTECTION IP56		
	△	REV MARK	APPROVED BY T.M.LIAO		CHECKED BY C.P.SU	TITLE OUTLINE FOR THREE PHASE INDUCTION MOTOR	
		DATE	DESIGNED BY C.C.CHU		DRAWING BY C.C.CHU		
		APPROVED BY	SCALE	UNIT			
		REVISED BY	inch				
		CONTENT			DRAWING NO. AS-061116		REV.MARK 00